



CERTIFIED RADON REPORT

February 26, 2014

Test Number: 7306-

Property Inspected: 5515 S. Drive, New Berlin, WI

Licensed Radalink Radon Inspector:
 Baumgardt Home Inspection, Inc.
 Kent Baumgardt
 P.O. Box 730
 Elm Grove, WI 53122
 Phone: 262-782-1230
 Fax: 262-782-5859

Test performed for:

 Milwaukee, WI 53202

Calibrated: 09/03/2013	Placed By: Kent Baumgardt (+)	Temp. Pressure R.H.
Test Started: 02/24/2014 2:35 PM	Retrieved By: Kent Baumgardt (+)	Min: 60.0 30.0 22
Test Ended: 02/26/2014 2:25 PM	Test Site: Finished Basement	Avg: 61.7 30.2 23
	Test Duration: 47 hours	Max: 63.0 30.2 23

(+)State license or certification number unavailable

AVERAGE RADON CONCENTRATION: 5.4 pCi/l

Test has met minimum EPA sampling duration.

Time	02/24/2014		02/25/2014		02/26/2014	
	pCi/l	Flags	pCi/l	Flags	pCi/l	Flags
00:35 am			5.0		4.7	
01:35			5.1		4.8	
02:35			6.4		5.7	
03:35			5.9		5.2	
04:35			5.6		4.9	
05:35			5.7		6.6	
06:35			6.3		5.2	
07:35			4.7		4.4	
08:35			4.8		4.3	
09:35			4.7		3.6	
10:35			4.0		3.5	
11:35			6.5		5.1	
12:35 pm			4.0		3.6	
01:35			6.3		4.4	
02:35			4.4			
03:35		Eq.	6.5			
04:35		Eq.	5.4			
05:35		Eq.	6.9			
06:35		Eq.	7.4			
07:35		5.8	8.0			
08:35		6.6	6.5			
09:35		6.1	5.6			
10:35		6.3	5.3			
11:35		5.3	5.5			

Flags: P= AC Power Disruption; T=Tilt
 Eq. = Equilization Period

While every effort was made to maintain optimum quality control and EPA Protocol during the testing period, neither Radalink, Inc. or its licensed agents provide any warranty, expressed or implied, for the consequences of erroneous test results. There can be some uncertainty with any measurement due to statistical variations, extreme weather changes, operation of the building, and other factors, Radalink, Inc. and its licensed operators shall not be liable under any charge or claim for losses, claims, charges, fees, demands, expenses, or damages resulting from a radon test. This report is subject to the terms on the last page of the document.

ENVIRONMENTAL DATA

MONITOR-TEST NUMBER: 7306-340

Property Inspected: 5515 S. Drive
New Berlin, WI 53151

Time	02/24/2014			02/25/2014			02/26/2014		
	Temp	InHg	RH	Temp	InHg	RH	Temp	InHg	RH
00:35 am				62.0	30.2	23	62.0	30.2	23
01:35				62.0	30.2	23	63.0	30.2	23
02:35				62.0	30.2	23	62.0	30.2	23
03:35				62.0	30.2	23	63.0	30.2	23
04:35				62.0	30.2	23	62.0	30.2	23
05:35				62.0	30.2	23	62.0	30.2	23
06:35				62.0	30.2	22	63.0	30.2	23
07:35				62.0	30.2	23	62.0	30.2	23
08:35				62.0	30.2	23	63.0	30.2	23
09:35				62.0	30.2	23	62.0	30.2	23
10:35				61.0	30.2	23	62.0	30.1	23
11:35				61.0	30.2	23	62.0	30.1	23
12:35 pm				61.0	30.2	23	62.0	30.1	23
01:35				61.0	30.1	23	62.0	30.0	22
02:35				61.0	30.2	23			
03:35	55.0	30.2	23	61.0	30.1	23			
04:35	60.0	30.2	23	61.0	30.1	23			
05:35	60.0	30.2	23	62.0	30.2	23			
06:35	60.0	30.2	23	61.0	30.1	23			
07:35	61.0	30.2	23	62.0	30.1	23			
08:35	61.0	30.2	23	62.0	30.2	23			
09:35	61.0	30.2	22	62.0	30.2	23			
10:35	61.0	30.2	23	62.0	30.2	23			
11:35	62.0	30.2	23	62.0	30.2	23			

AVERAGE RADON CONCENTRATION: 5.4 pCi/l



Reviewed and certified by

Terry Howell

Terry Howell, Quality Assurance Mgr.
Radalink, Inc. NEHA 135791T




	Minimum	Average	Maximum	Variance
Temperature:	60.0	61.7	63.0	0.52
Barometric Pressure:	30.0	30.2	30.2	0.0
Relative Humidity:	22	23	23	0.06

NOTE: The first hour's environmental data is excluded from the table above.

Radalink, Inc. 5599 Peachtree Road Atlanta, GA 30341 Phone: (800)295-4655

GRAPHICAL DATA VIEW

MONITOR-TEST NUMBER: 7306-340

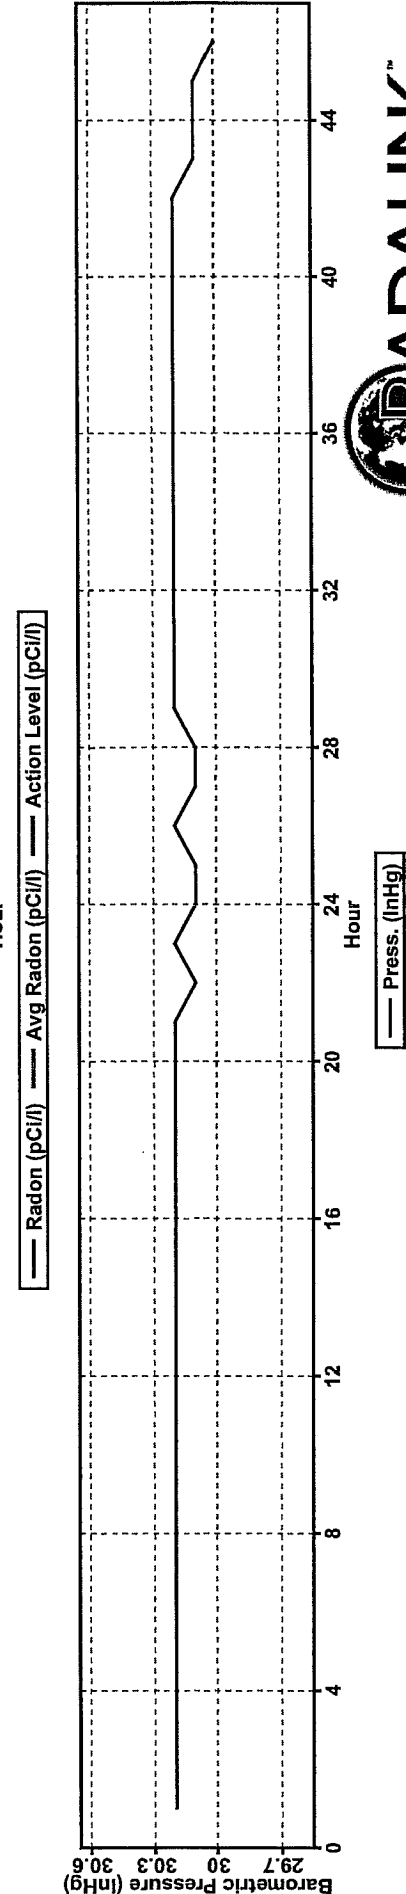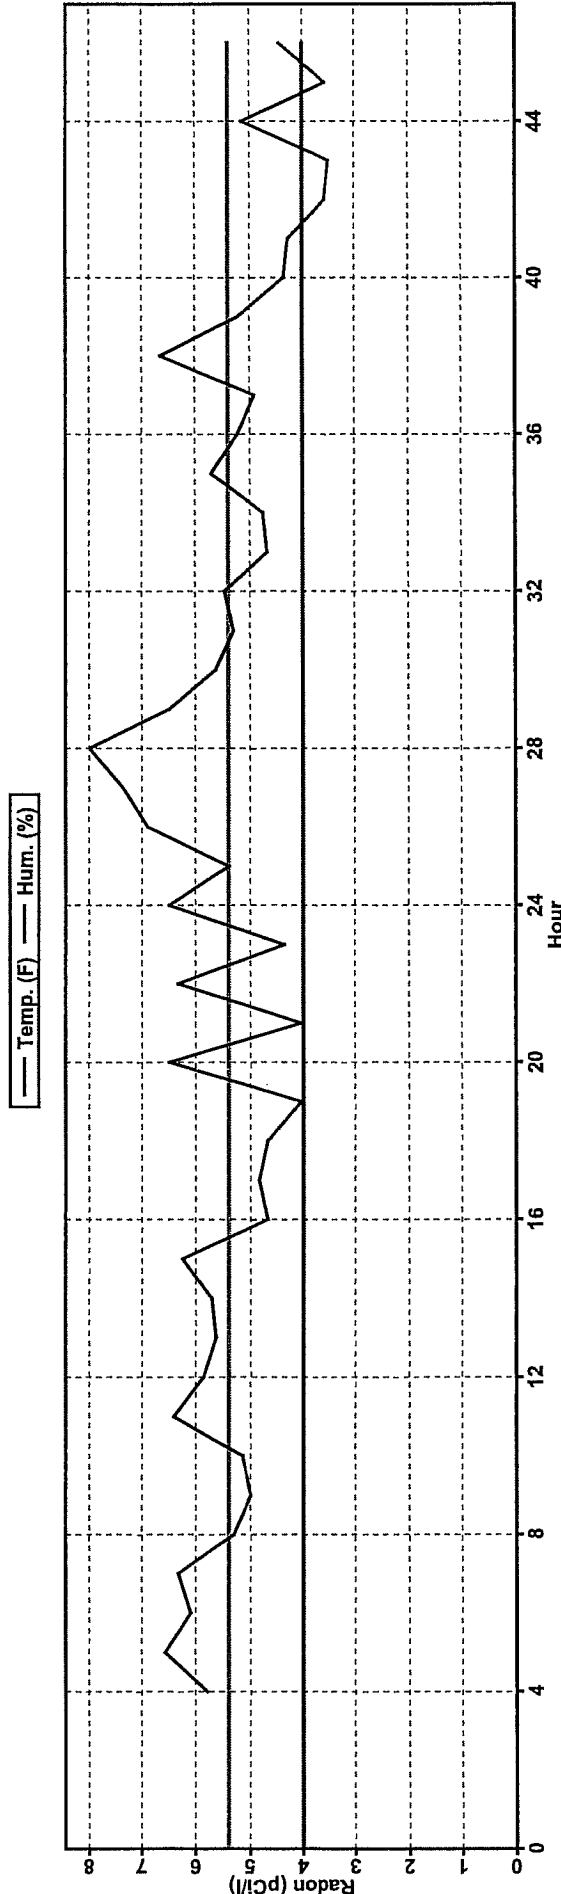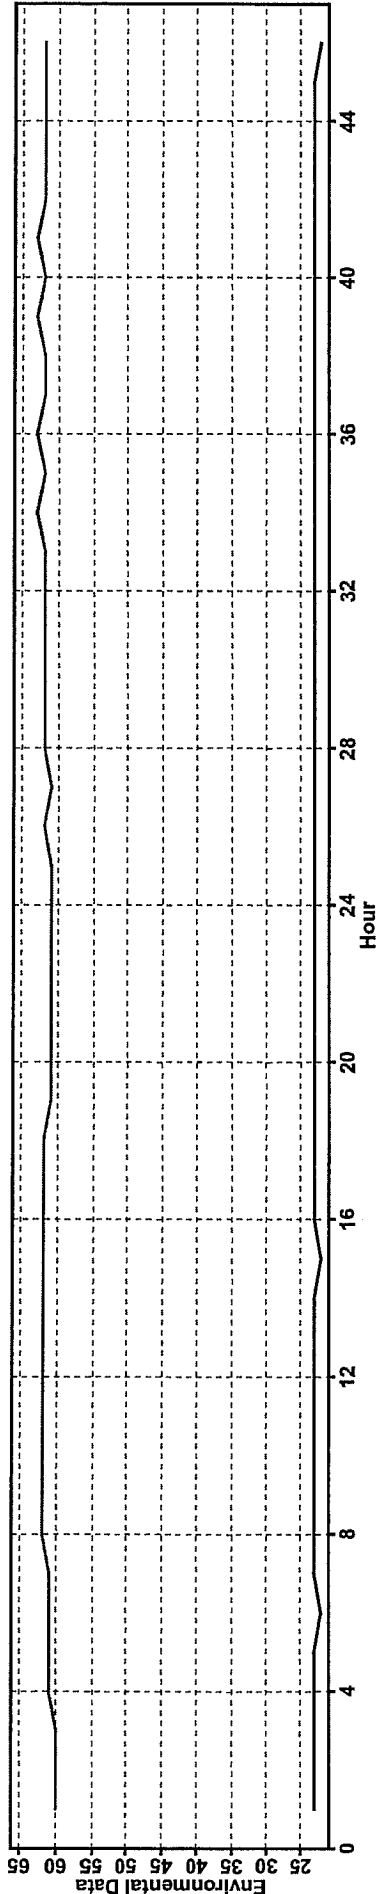

RADALINK
RADON MONITORS

Property Inspected: 5515 S. ... Drive, New Berlin, WI 53151

AVERAGE RADON CONCENTRATION: 5.4 pCi/l

IMPORTANT NOTICE

IF YOUR RADON TEST RESULT IS AT OR ABOVE EPA'S 4.0 pCi/L ACTION LEVEL

THE EPA AND YOUR STATE RADON PROGRAM RECOMMEND THIS HOME BE MITIGATED

If the average radon concentration in the home tested is at or above EPA's 4.0 pCi/L Action Level, mitigation is recommended. EPA and Radalink recommend either a state licensed (where applicable) or a NEHA or NRSB Certified radon mitigator to perform the system installation.

An Independent Post Mitigation Clearance Test

Upon completion of the work, the EPA recommends that you have an **independent** post-mitigation test performed. If the current owners are hiring the mitigation contractor, notify them prior to the installation that you intend to have your Radalink affiliated radon professional perform the post mitigation test. (Call your Radalink affiliate for service prices and details.) According to EPA and state protocol, the test can be conducted after the remediation system has been running continuously for 24 hours. Find out when the work will be completed and inform your Radalink affiliate so the test can be scheduled as soon as possible.

Make Sure the Installation Meets EPA Mitigation Standards

For your added protection, many Radalink affiliates inspect the mitigation systems to ensure they meet the EPA Mitigation Standards or state requirements and provide you with a completed Checklist Inspection Report.

Call Your Radalink Affiliate For Service Prices and Details.

